
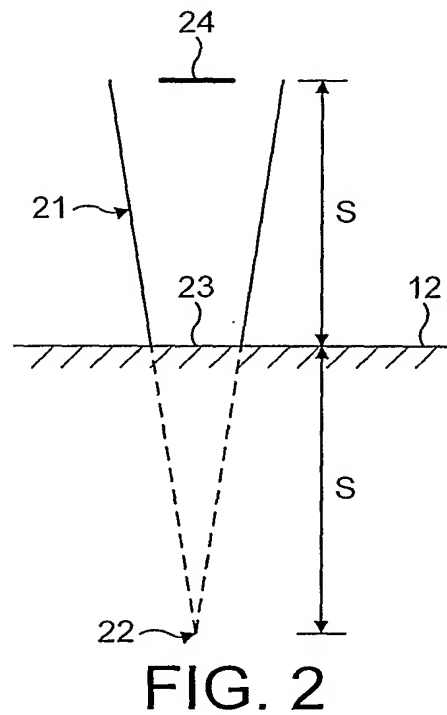


1 / 6

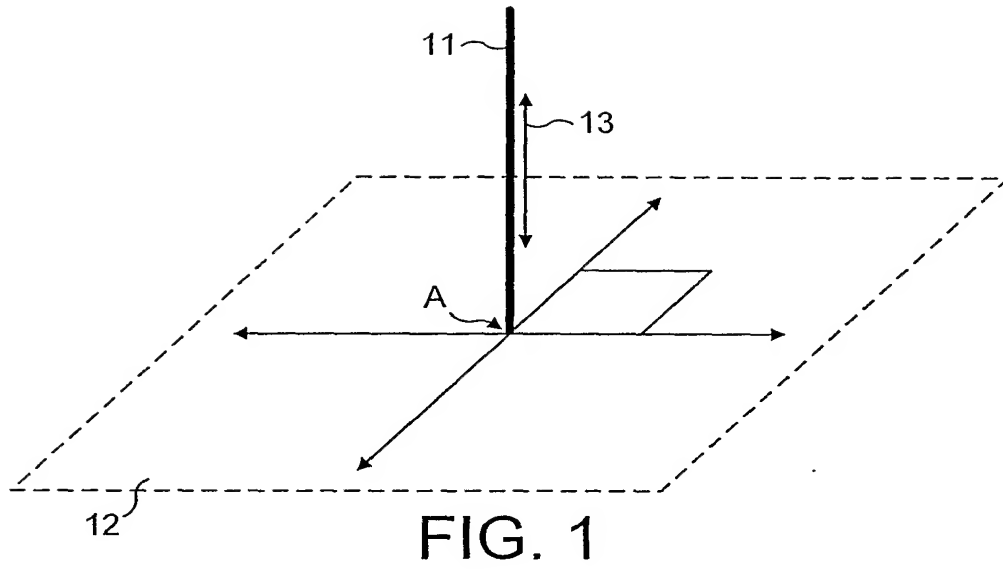

2 / 6

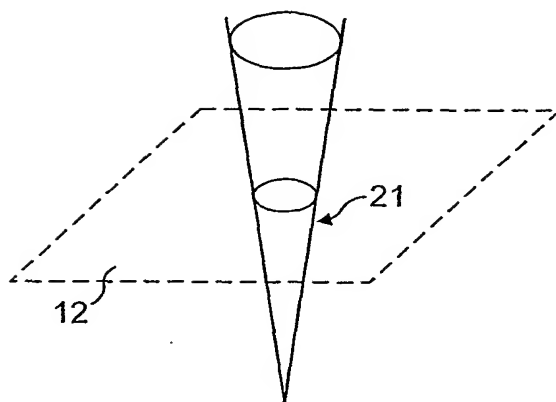


FIG. 3a

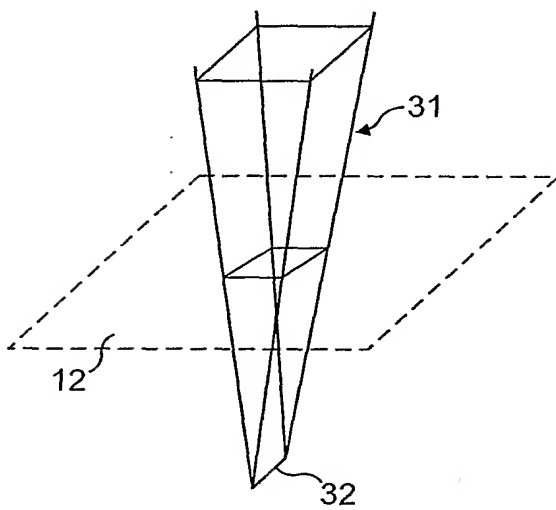


FIG. 3b

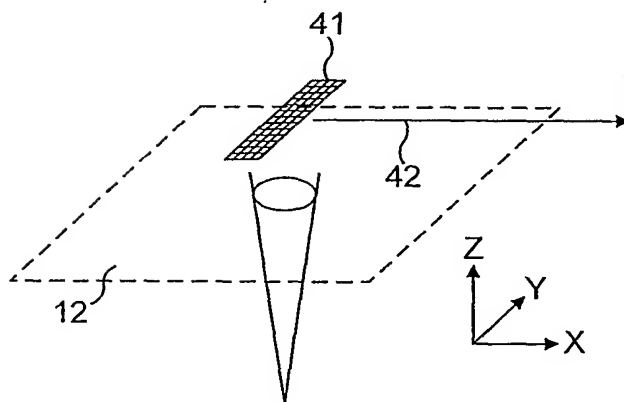


FIG. 4

3 / 6

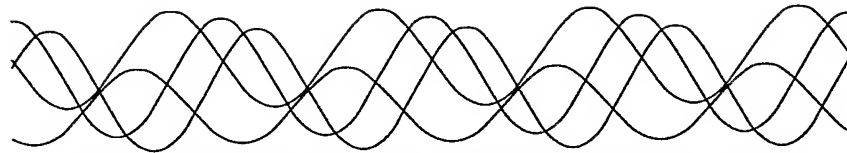
Basic signals  $S(i,t)$  from detector element  $i=1,2,3,4$ 

FIG. 5a

Signal  $R(i,t)$  after subtraction of reference values  
and rectification  $i=1,2,3,4$ 

FIG. 5b

Averaged signal (raw signal)  $R(t)$  from the detector array

FIG. 5c

Calculated phase values  $\alpha(t)$  after use of phase algorithm

FIG. 5d

Unwrapped phase values, or displacement  $U(t)$  of OUI

FIG. 5e

4 / 6

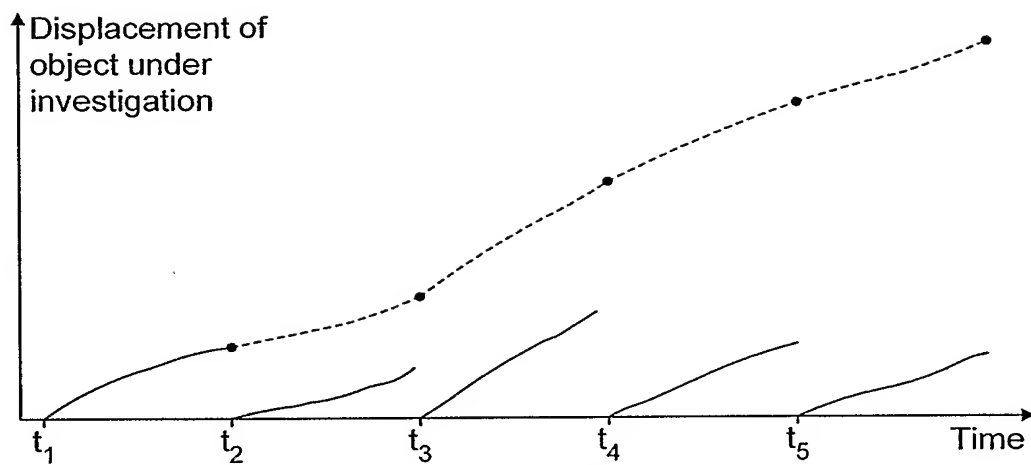


FIG. 6a



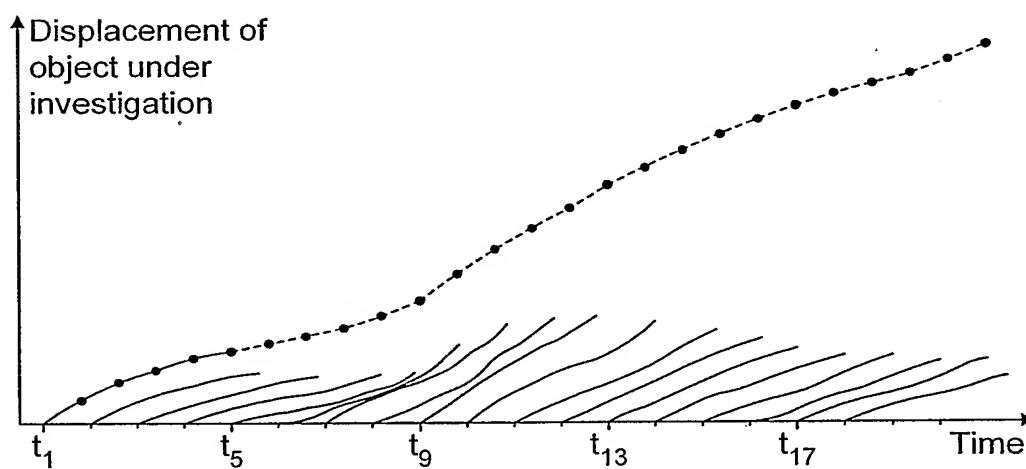


FIG. 6b

5 / 6

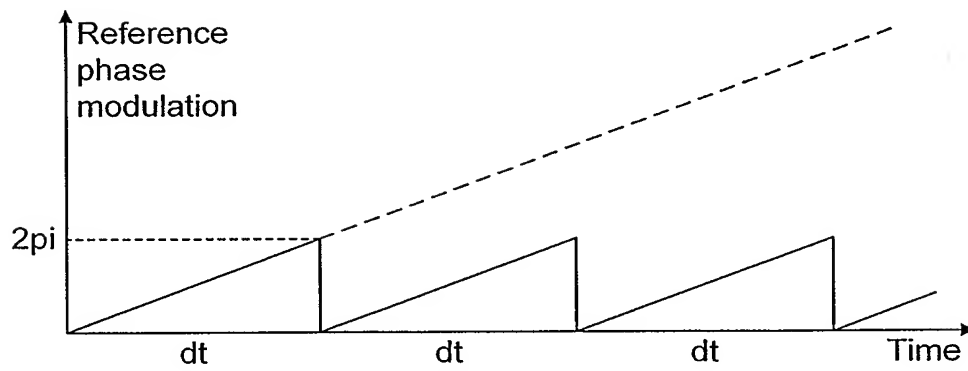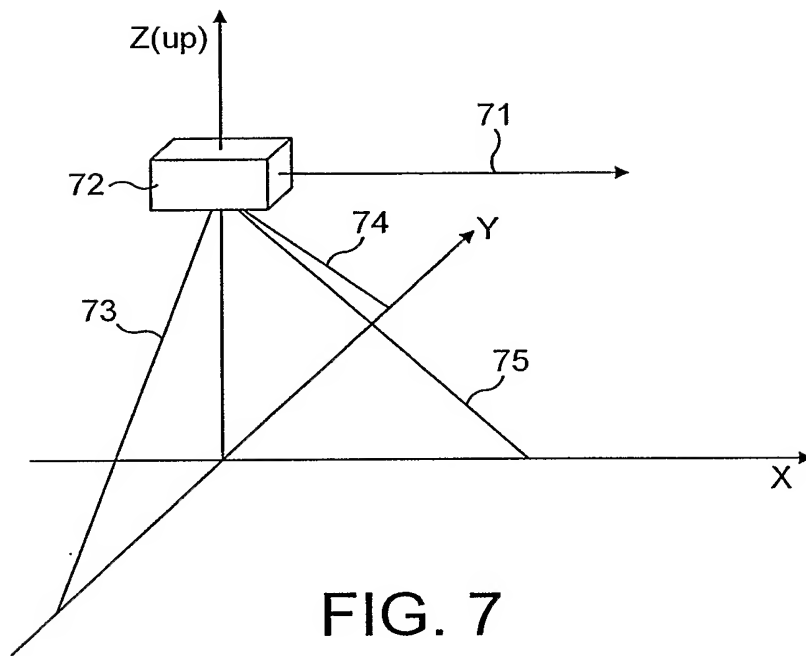

6 / 6

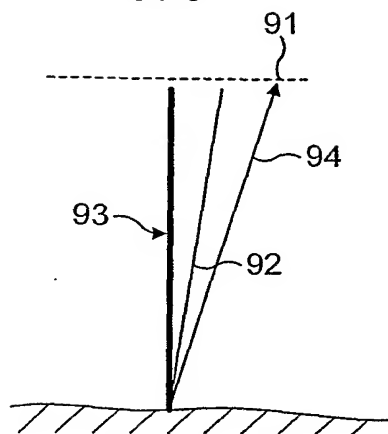


FIG. 9

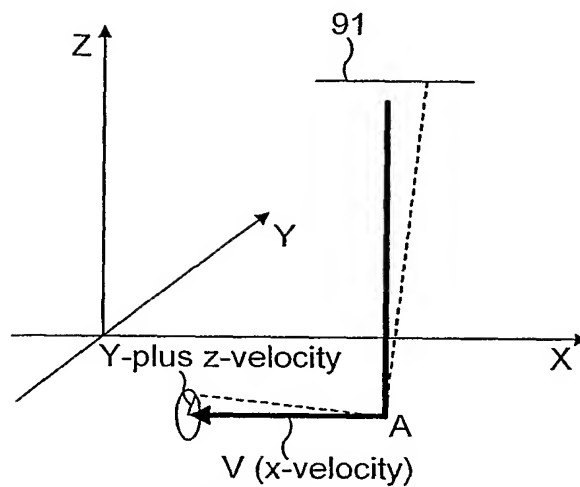


FIG. 10

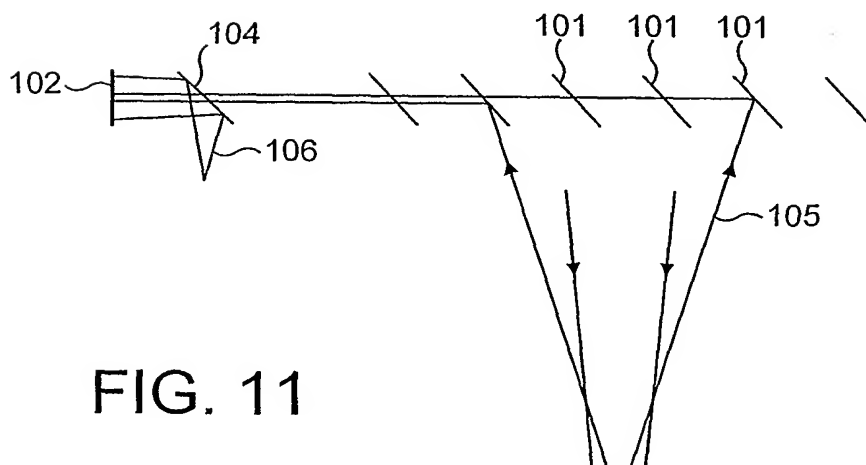


FIG. 11